





WIRE ROPE ISOLATORS

- MULTI-AXIS ISOLATION
- SHOCK AND VIBRATION PROTECTION
- MAINTENANCE-FREE

SV062 SERIES 1/16" CABLE DIA

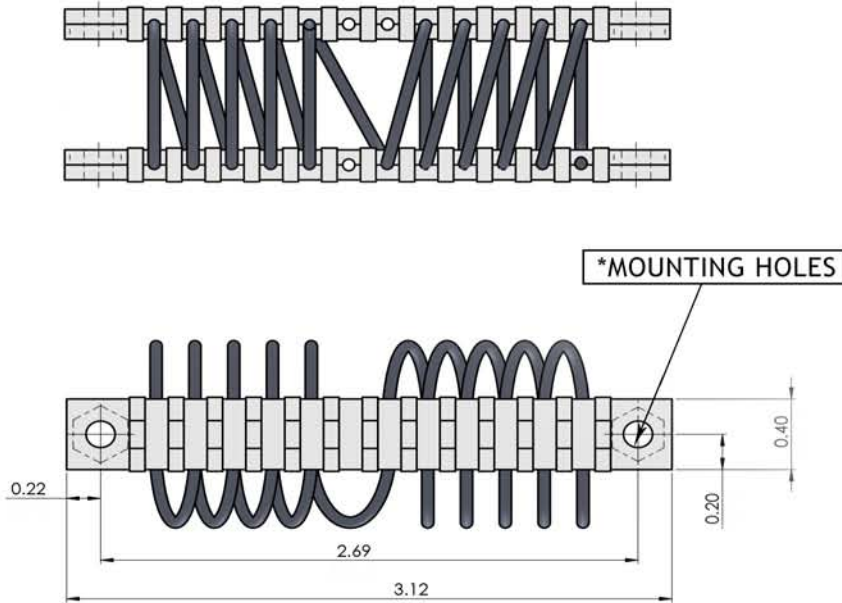

MATERIAL SPECIFICATION:

CABLE WIRE: STAINLESS STEEL (MIL-W-83420)
 RETAINING BARS: ALUMINUM ALLOY 6061-T6; IRIDITED (MIL-C-5541)
 RETAINING CLIPS: STAINLESS STEEL

MODEL	DIMENSIONS			COMPRESSION		SHEAR & ROLL		45° COMPRESSION / ROLL	
	WIRE DIA IN	H IN	OD IN	SPRING RATE LB/IN	MAX DEFL IN	SPRING RATE LB/IN	MAX DEFL IN	SPRING RATE LB/IN	MAX DEFL IN
SV062-01-A	1/16"	0.7	1.0	99	0.3	69	0.3	37	0.6
SV062-02-A		0.8	1.1	65	0.4	54	0.4	23	0.7
SV062-03-A		1.0	1.2	36	0.5	48	0.6	11	0.8
SV062-04-A		1.1	1.3	25	0.6	32	0.7	8	0.9
SV062-05-A		1.2	1.4	18	0.7	24	0.8	5	1.0
SV062-06-A		1.3	1.5	14	0.8	21	0.9	4	1.1

* SHOWN WITH #8-32 THREADED INSERTS BOTH BARS; REPLACE -A WITH -C FOR CSK HOLES

CONTACT OUR ENGINEERING DEPARTMENT FOR SIZING AND PRICING AT
 SUPPORT@SHOCKANDVIBRATIONS.COM, 631-209-5354 (P), OR 631-857-7844 (F)